

Features

- General conducted attenuation performance
- Easy to install, compact size
- Snap-in mount
- Current rating 1A~10A
- With IEC320 AC socket and fuse holder

Marketing Applications

- Controls and communication systems
- Surveillance system
- Medical power supply
- Diagnostic imaging device
- Clinical chemistry analyzer


Numbering System

1 SS3 **2** - **3** **4** P **5** **6** **7** - **8** (S)


- | | |
|--|--|
| <p>1 Rated current
01,02,04,06,10</p> <p>2 Electrical schematic
A: medical compliance</p> <p>3 Additional schematic (optional)
A: high performance</p> <p>4 Fuse holder
1: can be installed single fuse
2: can be installed dual fuses</p> | <p>5 Components value (refer Filter selection table)
S: Cx=0.1uF</p> <p>6 Grounded choke (optional)
G: Lg= 100uH</p> <p>7 Bleeder resistor (optional)
R: R= 1M ohm; 1/4W min.</p> <p>8 Output connections (refer Output terminal)
Q: fast-on tab (6.3mm)
W: with wired (100mm)</p> |
|--|--|

Electrical Schematic •

• A: medical compliance

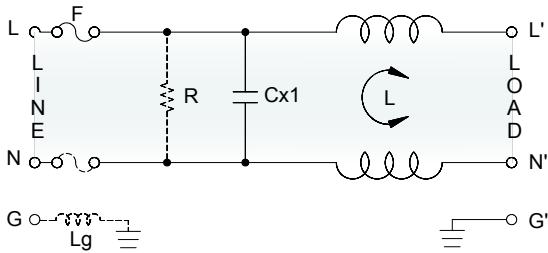


• A: high performance

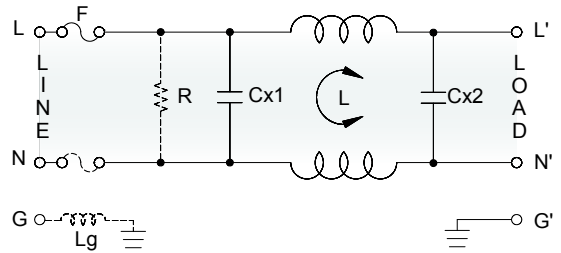


Filter Attenuation Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)


■ 1A~3A



■ 4A~6A



■ 8A~10A




Common mode / Asymmetric (L-G) ————
Differential mode / Symmetric (L-L) - - - - -

Filter Selection Table •


Filter Part No.	Rated Current @50°C [A]	Leakage Current @250VAC/50Hz [µA]	Inductance @10KHz,0.25V [mH]	Capacitance			Output terminal	
				Cx1 [µF]	Cx2 [µF]	Cy [nF]		
A: medical compliance								
01SS3A-.PS..	1	5	6.5	0.1	-	-	-Q	-W
02SS3A-.PS..	2	5	3.8	0.1	-	-	-Q	-W
04SS3A-.PS..	4	5	1.6	0.1	-	-	-Q	-W
06SS3A-.PS..	6	5	0.8	0.1	-	-	-Q	-W
10SS3A-.PS..	10	5	0.2	0.1	-	-	-Q	-W
A: high performance								
01SS3A-A.PS..	1	5	6.5	0.1	0.1	-	-Q	-W
02SS3A-A.PS..	2	5	3.8	0.1	0.1	-	-Q	-W
04SS3A-A.PS..	4	5	1.6	0.1	0.1	-	-Q	-W
06SS3A-A.PS..	6	5	0.8	0.1	0.1	-	-Q	-W
10SS3A-A.PS..	10	5	0.2	0.1	0.1	-	-Q	-W

Output Terminal (unit: mm)

- **Q:** fast-on tab based on UL310 standard






- **W:** with wired stripped and tinned



Mechanical Drawing (unit: mm)

- snap-in mount | compact



Suggested Panel Cutout
(Mounting from front)

