

Features

- Standard conducted attenuation performance
- With DPST rocker switch
- Front mounting
- Current rating 1A~10A
- With IEC320 AC socket and switch

Marketing Applications

- Controls and communication systems
- Surveillance system
- Medical power supply
- Diagnostic imaging device
- Clinical chemistry analyzer

Numbering System

1 SS3 **2** - **3** S **4** **5** **6** - **7** (**8**)

1 Rated current

01,02,04,06,10

2 Electrical schematic

A: medical compliance

3 Additional schematic (optional)

A: high performance

4 Components value (refer Filter selection table)

S: Cx=0.1uF

5 Grounded choke (optional)

G: Lg= 100uH

6 Bleeder resistor (optional)

R: R= 1M ohm; 1/4W min.

7 Output connections (refer Output terminal)

Q: fast-on tab (6.3mm)

W: with wired (100mm)

8 Type of switch


B: switch with black rocker

R: switch with illuminated red rocker


G: switch with illuminated green rocker

Electrical Schematic

● A: medical compliance

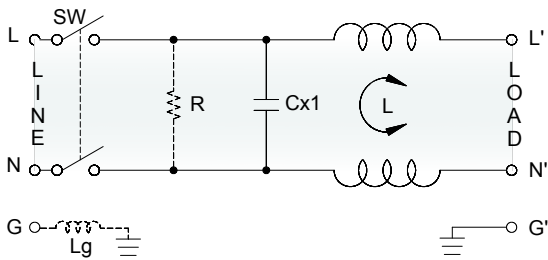


● A: high performance

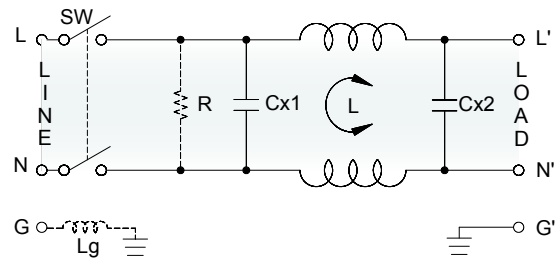


Filter Attenuation

Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)


■ 1A~3A



■ 4A~6A



■ 8A~10A




Common mode / Asymmetric (L-G) ———
 Differential mode / Symmetric (L-L) - - - -

Filter Selection Table •


Filter Part No.	Rated Current @50°C [A]	Leakage Current @250VAC/50Hz [µA]	Inductance @10KHz,0.25V [mH]	Capacitance			Output terminal	
				Cx1 [µF]	Cx2 [µF]	Cy [nF]		
A: medical compliance								
01SS3A-SS..	1	5	6.5	0.1	-	-	-Q	-W
02SS3A-SS..	2	5	3.8	0.1	-	-	-Q	-W
04SS3A-SS..	4	5	1.6	0.1	-	-	-Q	-W
06SS3A-SS..	6	5	0.8	0.1	-	-	-Q	-W
10SS3A-SS..	10	5	0.2	0.1	-	-	-Q	-W
A: high performance								
01SS3A-ASS..	1	5	6.5	0.1	0.1	-	-Q	-W
02SS3A-ASS..	2	5	3.8	0.1	0.1	-	-Q	-W
04SS3A-ASS..	4	5	1.6	0.1	0.1	-	-Q	-W
06SS3A-ASS..	6	5	0.8	0.1	0.1	-	-Q	-W
10SS3A-ASS..	10	5	0.2	0.1	0.1	-	-Q	-W

Output Terminal (unit: mm)

- **Q:** fast-on tab based on UL310 standard



- **W:** with wired stripped and tinned



Mechanical Drawing (unit: mm)

- screw mount

