

Features

- Standard conducted attenuation performance
- Single stage power line filter
- Current rating 10A~30A
- Various output connections
- Practical solution for general devices

Marketing Applications

- Single-phase power supplies
- Electrocardiograph
- Electrosurgical generator
- Network technology
- Medical device (not body-coupled)

Numbering System

1 SS4 A - **2** **3** - **4** **5** - **6**

1 Rated current

10,20,30

2 Electrical schematic

1A,1B

3 Type of case (refer Mechanical drawing)

B1

4 Components value (refer Filter selection table)

B: Cx=0.1uF

Blank: Cx=0.22uF

5 Bleeder resistor (optional, refer Filter selection table)

R

6 Output connections (refer Output terminal)


Q: fast-on tab (6.3mm)

S: screw (M4)


W: with wired (100mm)

Electrical Schematic

● 1A

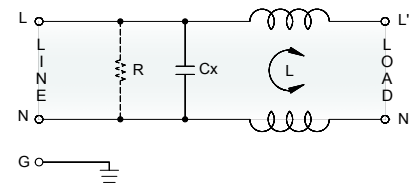


● 1B

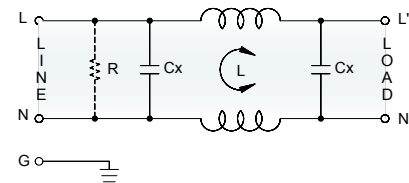


Filter Attenuation

Insertion loss (dB) in 50 ohm system CISPR 17 (for reference only)


■ 10A



■ 20A



■ 30A



Common mode / Asymmetric (L-G) ————
 Differential mode / Symmetric (L-L) - - - -


Filter Selection Table ●

Filter Part No.	Rated Current @50°C [A]	Leakage Current @250VAC/50Hz [μA]	Inductance @10KHz,0.25V [mH]	Capacitance		Resistor R [Ω]	Output terminal		
				Cx [μF]	Cy [nF]				
1A:									
10SS4A-1AB1-B.	10	5	1.5	0.1	-	1M	-Q	-S	-W
20SS4A-1AB1-B.	20	5	0.9	0.1	-	1M	-Q	-S	-W
30SS4A-1AB1-B.	30	5	0.3	0.1	-	1M	-Q	-S	-W
1B:									
10SS4A-1BB1-.	10	5	1.5	0.22	-	2.2M	-Q	-S	-W
20SS4A-1BB1-.	20	5	0.9	0.22	-	2.2M	-Q	-S	-W
30SS4A-1BB1-.	30	5	0.3	0.22	-	2.2M	-Q	-S	-W


Output Terminal

(unit: mm)


- **Q:** fast-on tab based on UL310 standard



- **S:** screw based on ISO4032 standard





- **W:** with wired stripped and tinned



Mechanical Drawing (unit: mm) ●

- B type



Case	B1
A	39.5
B	42.3
C	65.5
D	52.5
E	74.7
F	84.8
G	2-Ø4.8